



FLEXIBLE MEDIA

PRODUCT SHEET



SOLVENT MEDIA

Laminated Frontlit Media

Product ID	Thickness (mm)	Roll Width (m)	Construction	Weight (gr/sqm)
QSFH340 M / G	0.30±0.02	Note 1	200x300D, 18x12	340
QSFH450 M / G	0.38±0.02	Note 1	300x500D, 18x12	450
QSFL450-9 M / G	0.38±0.02	Note 1	500x500D, 9x9	450
QSFM500 M / G +	0.40±0.02	Note 1	300x500D, 18x12	500
QSFH500-9 M / G +	0.40±0.02	Note 1	1000x1000D, 9x9	500
QSFL500-9 M / G +	0.40±0.02	Note 1	500x500D, 9x9	500
QSFH580 M / G +	0.46±0.02	Note 1	500x500D, 18x12	580
QSFL580 M / G +	0.46±0.02	Note 1	300x500D, 18x12	580

Laminated Backlit Media

Product ID	Thickness (mm)	Roll Width (m)	Construction	Weight - gr/sqm
QSB500 M / G	0.40±0.02	Note 1	300x500D, 18x12	500
QSBH500 M / G +	0.40±0.02	Note 1	500x500D, 18x12	500
QSBH610 M / G +	0.48±0.02	Note 1	500x500D, 18x12	610

Coated Frontlit Media

Product ID	Thickness (mm)	Roll Width (m)	Construction	Weight - gr/sqm
QSC450 M / G + *	0.40±0.02	Note 1	1000x1000D, 18x18	450
QSC510 M / G + * #	0.42±0.02	Note 1	1000x1000D, 18x18	510
QSC900 M / G + *	0.70±0.02	Note 1	1000x1000D, 30x30	900

Coated Backlit Media

Product ID	Thickness (mm)	Roll Width (m)	Construction	Weight - gr/sqm
QSCB510 M / G + *	0.45+ 0.02	Note 1	1000x1000D, 18x18	510

Note 1 Standard widths: 1.02, 1.22, 1.27, 1.37, 1.60, 1.80, 2.02, 2.20, 2.50, 2.80, 3.20


+ Optional 5 meter width

* Optional B1 Fire Retardant

Optional UL94-V0 Fire Retardant

General Standard outdoor durability is 1 year
 Suffixes: M = Matt / G = Gloss
 Standard roll length is 50 m
 Hard Packing is standard

Processing Methods

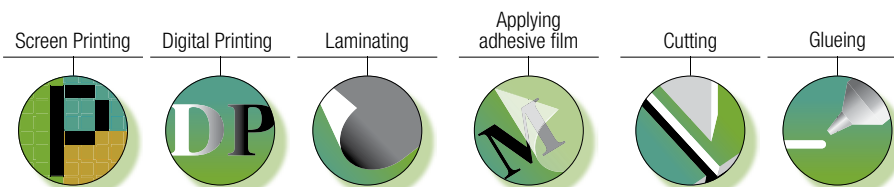



FLEXIBLE MEDIA

PRODUCT SHEET



SOLVENT MEDIA

Blockout					
Product ID	Thickness (mm)	Construction	Standard Widths	Weight - gr/sqm	Comments
QSOS440 *	0.34±0.02	300x300D, 42x40	Note 1	440	double sided matt only
QSOS510 *	0.36±0.02	300x300D, 42x40	Note 1	510	double sided matt only
QSOS780 *	0.55±0.02	1000x1000D, 18x18	Note 1	780	double sided matt only
PQSFO480-WG	0.38±0.02	0.125mm PET + 2 layer PVC	Note 1	480	frontlit - One side white matt / Other side grey
PQSFO480-WW	0.38±0.02	0.125mm PET + 2 layer PVC	Note 1	480	double sided white matt

Blockout					
Product ID	Thickness (mm)	Construction	Standard Widths	Weight - gr/sqm	Comments
QSFBL450 M/G	0.38±0.02	300x500D, 12x18	Note 1	450	one side black, one side white
QSFBL500-9 M/G +	0.40±0.02	500x500D, 9x9	Note 1	500	one side black, one side white
QSFBL500-9 M/G +	0.40±0.02	1000x1000D, 9x9	Note 1	500	one side black, one side white

Mesh					
Product ID	Thickness (mm)	Construction	Standard Widths	Weight - gr/sqm	Comments
QSM270 + *	0.38±0.02	12x12 , 1000Dx1000D	Note 1, Option B1	270	Options: 5m width, B1
QSM270	0.43±0.02	12x12 , 1000Dx1000D	Note 1	350	liner option can be ordered up to 3.2m only

Note 1 Standard widths: 1.02, 1.22, 1.27, 1.37, 1.60, 1.80, 2.02, 2.20, 2.50, 2.80, 3.20

+ Optional 5 meter width

* Optional B1 Fire Retardant

Optional UL94-V0 Fire Retardant

General Standard outdoor durability is 1 year

Suffixes: M = Matt / G = Gloss

Standard roll length is 50 m

Hard Packing is standard

Processing Methods

